




HYWALL
without reinforced bar



HYWALL
with reinforced bar



HYWALL
Simplified geometry

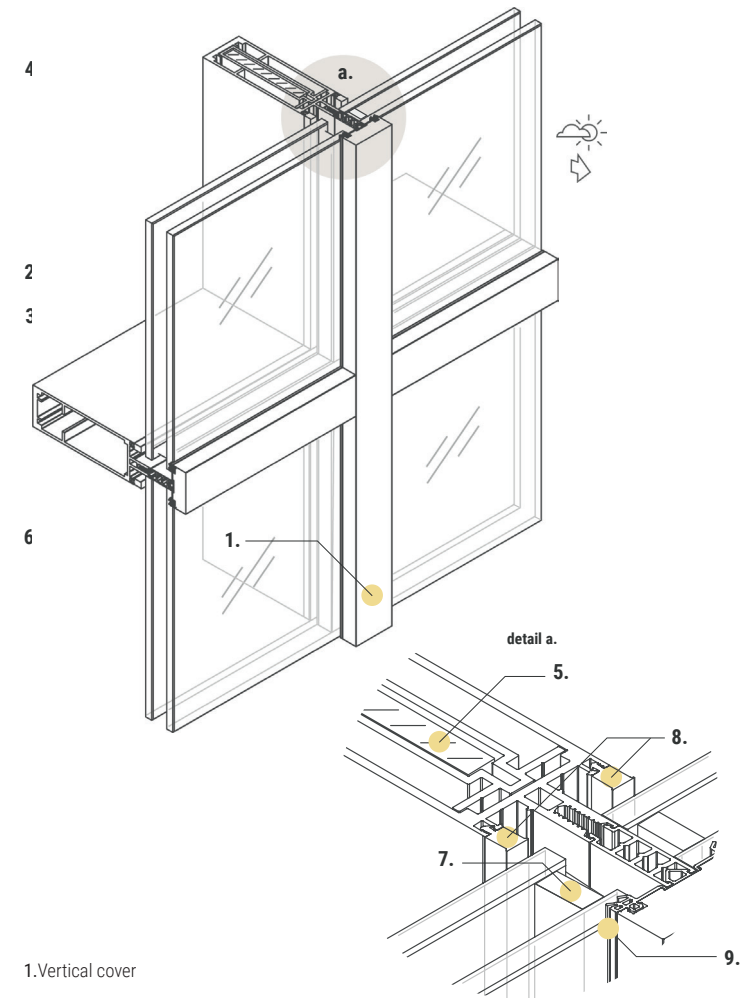

1. Vertical cover
2. Horizontal cover
3. Curtain wall with transom
4. Curtain wall mullion
5. Reinforcement bar
6. Glass
7. Glass spacer
8. Exterior gasket
9. Interior gasket

DIMENSIONS


Max weight [kg] <i>per panel</i>	up to 1200
Max weight [kg] on transom	up to 700
Max. Glazing Area <i>per panel</i>	19.2m²
Glazing capacity [mm]	6 - 14 26 - 34 36 - 44 46 - 54

PERFORMANCE Thermal

Thermal Transmittance [Double glazing]	Up to 1.06 W m² K
Thermal Transmittance[Triple glazing]	Up to 0.66 W m² K

CERTIFICATION

EU Regulatory Compliance	CE & CPR Certified
	EPBD Optimized
	EPD Verified
USA Regulatory Compliance	NFRC Certified

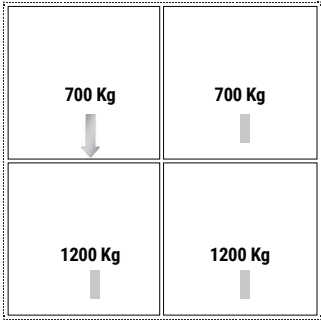

The art of
pure façade.

The **HYLINE** minimalist curtain wall system, integrates the concept of minimalism into a multi-modular and flexible curtain wall system, combining minimalist-inspired design and unique sealing features.

It offers a mullion/transom with a thickness of only 48mm, maintaining the **Hyline DNA** and maximizing natural lighting, as well as energy and acoustic insulation performance.

Copyright © 2026 HYLINE- All rights in and to the works, materials, documents and information disclosed herein are exclusively owned by and reserved to HYLINE GROUP and are under HYLINE's GROUP Intellectual Property Regulation and respective Disclaimer. In particular, the works, materials, documents and information disclosed herein may not be reproduced, published, distributed, disclosed, displayed, disassembled, modified or transmitted in any form or by any means, in whole or in part, including but not limited to by photocopying, recording, or other electronic or mechanical methods, without the prior written permission of HYLINE. The Recipient shall not use any automated means to copy, scrape, extract or process and recombine information or data from the Materials. For permission requests, please contact info@hyline-bst.com.